

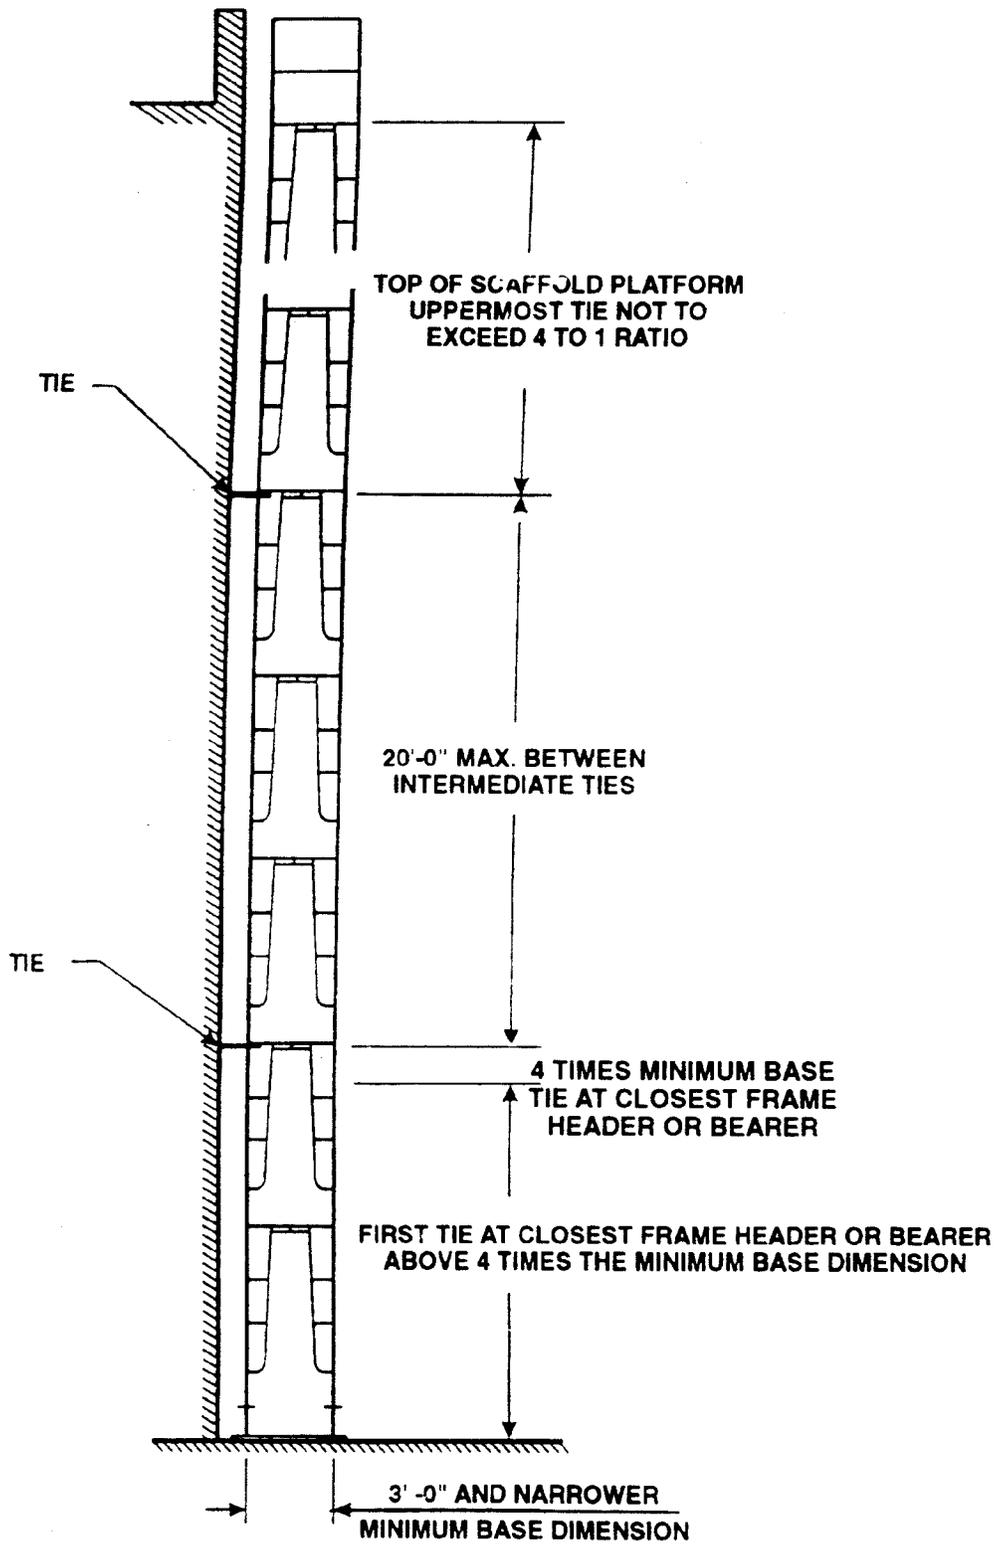




MAXIMUM VERTICAL TIE SPACING 3'- 0" AND NARROWER BASES




SYSTEM SCAFFOLD



**JOINT CONNECTIONS
VARY ACCORDING
TO MANUFACTURER**



GUARD RAIL SYSTEM

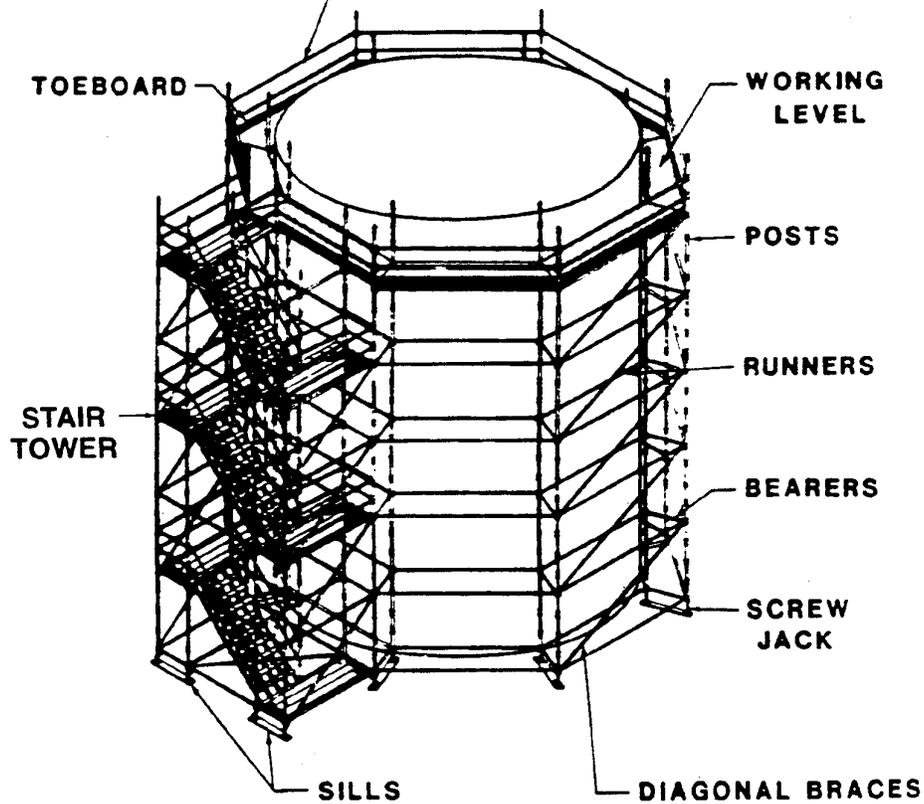


SPIB® DNS IND 65
KD19 S-DRY **7**
SCAFFOLD PLANK

Grade stamp courtesy of Southern Pine Inspection Bureau

MILL 10
WC LB®
SEL STR
SCAF PLK
D. FIR S. DRY

Grade stamp courtesy of West Coast Lumber Inspection Bureau

TUBE and COUPLER SCAFFOLD

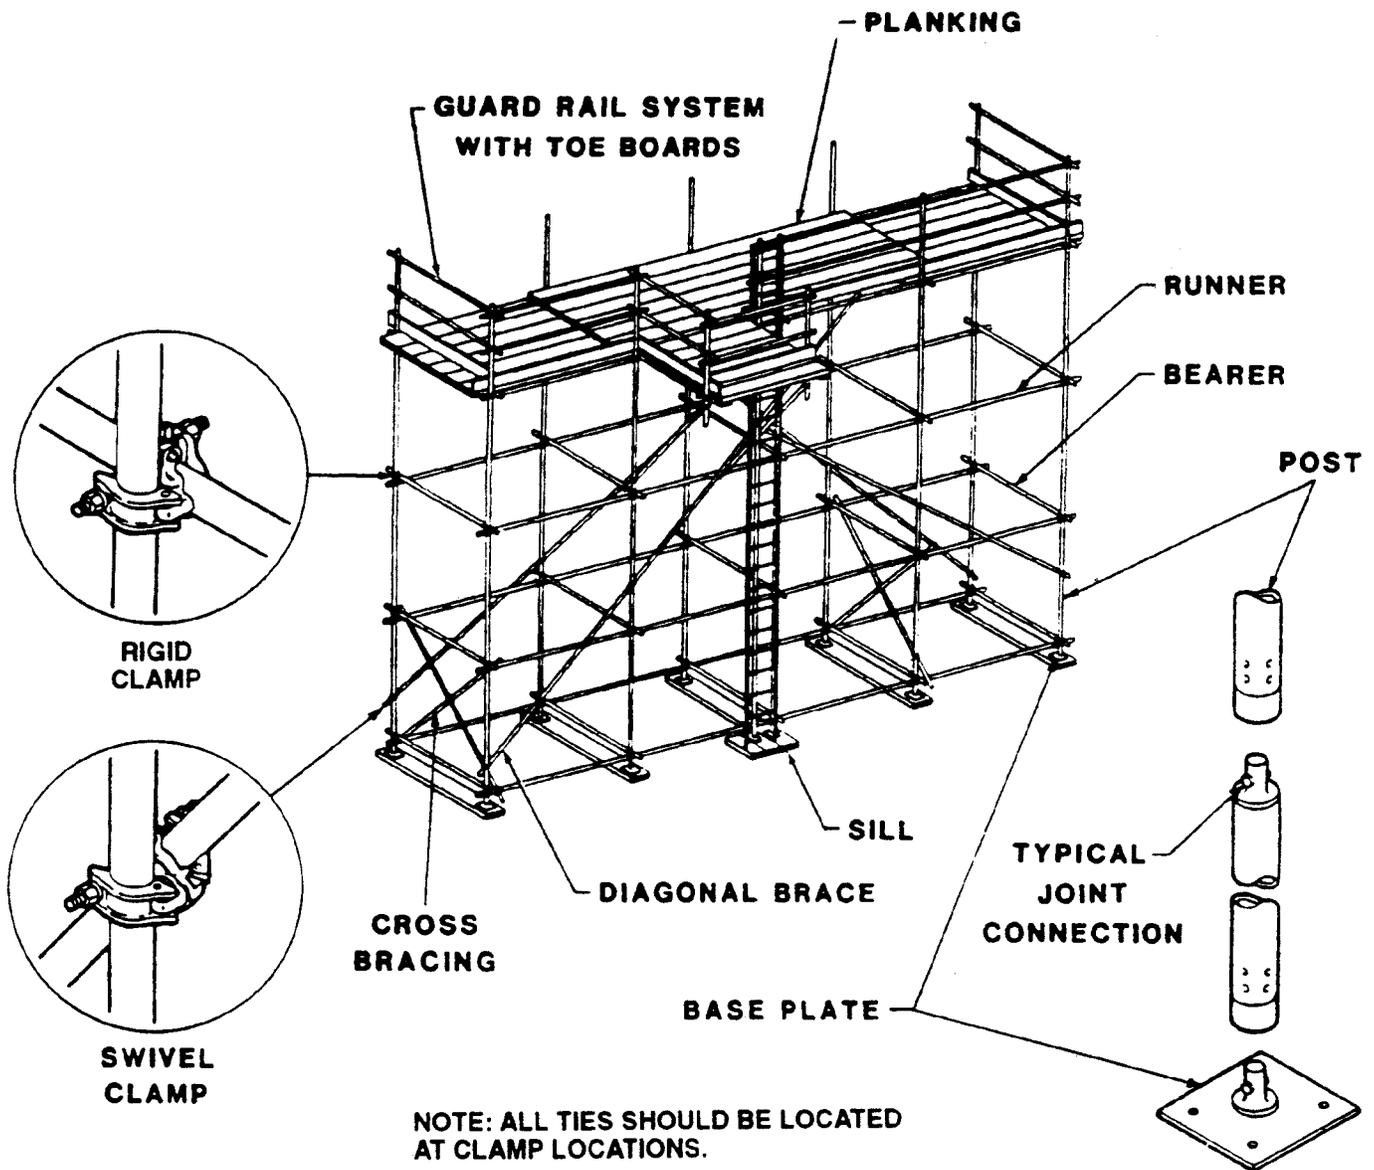

NOTE: ALL TIES SHOULD BE LOCATED AT CLAMP LOCATIONS.

SCAFFOLDING WORK SURFACES



**LAMINATED
VENIER
LUMBER
(LVL)**




**SOLID
SAWN
LUMBER**


SCAFFOLD PLANKS




**FABRICATED
SCAFFOLD
DECK**

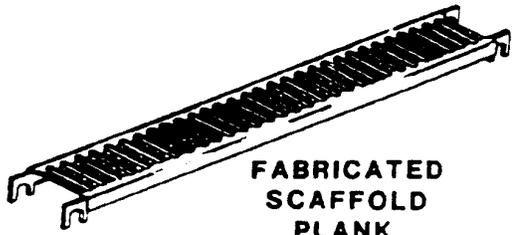

**FABRICATED
SCAFFOLD
PLANK**




DECORATOR PLANK

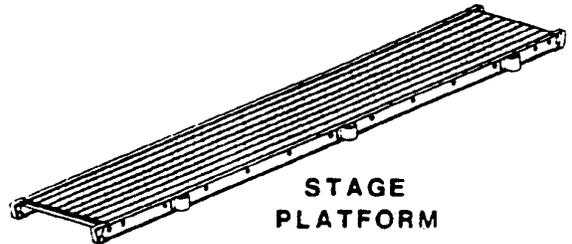

**STAGE
PLATFORM**




**WOOD
SCAFFOLD
PLATFORM**

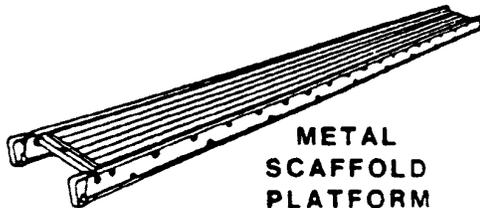

**METAL
SCAFFOLD
PLATFORM**

OUTRIGGER SCAFFOLD

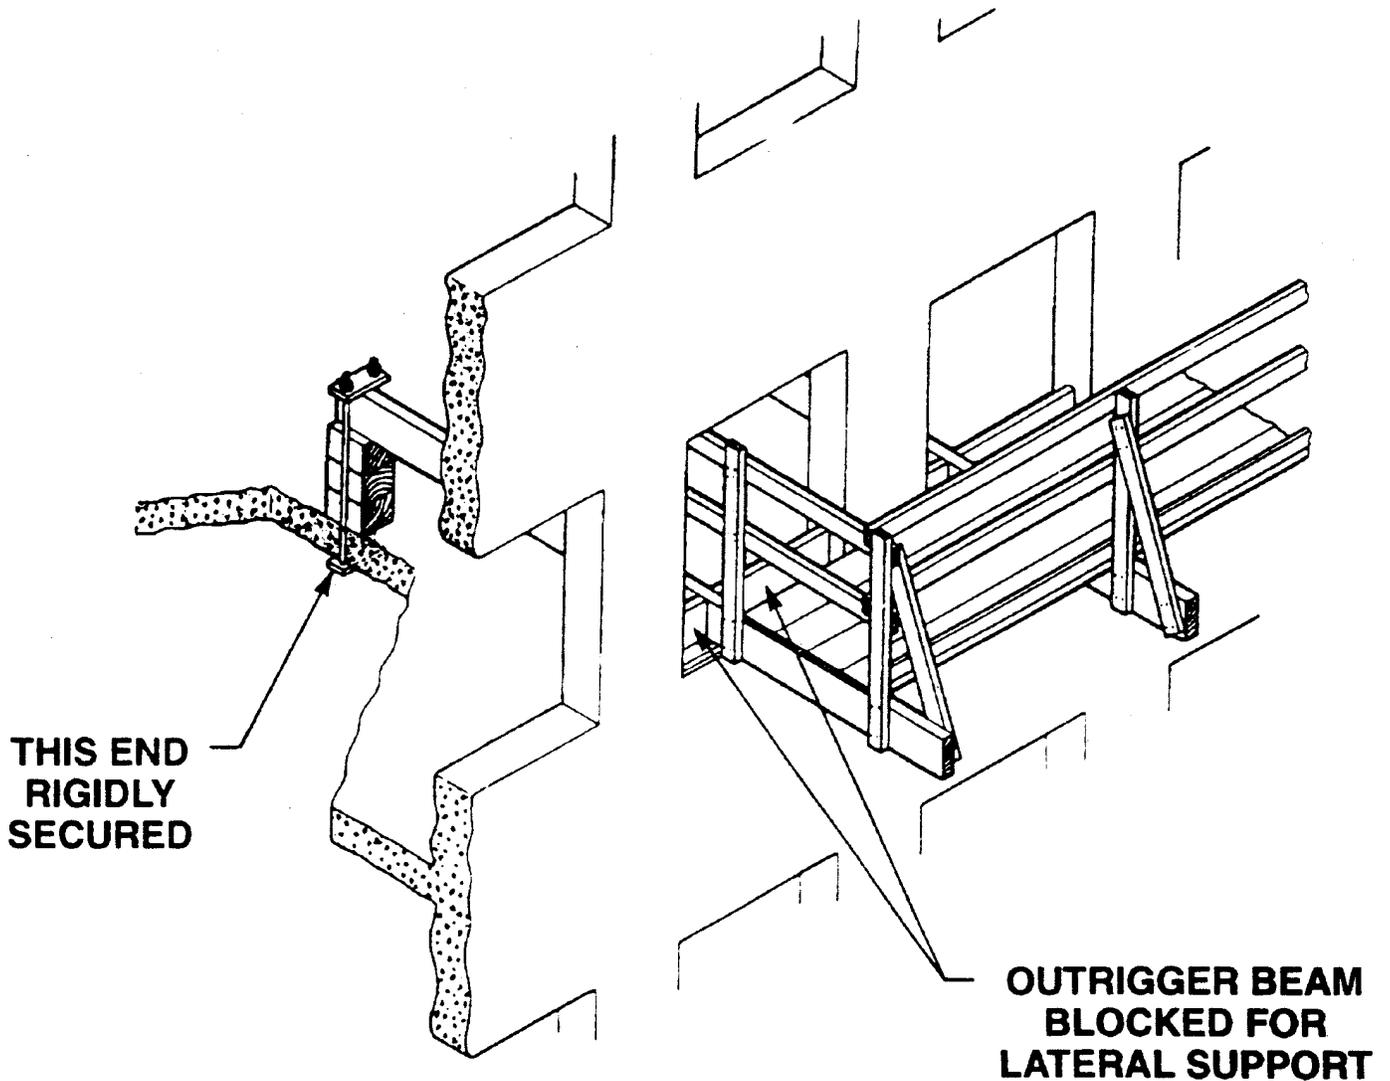

§ 1926.556 [Removed]

2. Section 1926.556 is removed.

[FR Doc. 96-21289 Filed 8-29-96; 8:45 am]

BILLING CODE 4510-26-P